




ELPRESS®

Product Datasheet

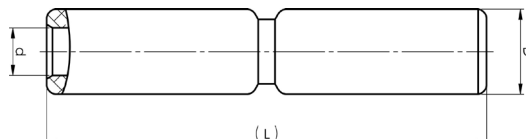

Aluminium through connectors with partition 16 - 1200 mm²

Stranded Al mm ²	Solid Al mm ²	AWG Al (Stranded)	AWG Al (Solid Al)	Name	d (mm)	D	L	s	Pcs/pack	Tool
16-25		6-4		AS1625	6,2	11,5	35	18		V600
16	25	6	4	AS16	5,9	13	67	29	48	V600, V1300, V250
25	35	4	2	AS25	6,8	13	67	29	48	V600, V1300, V250
35	50	2	1/0	AS35	8,5	20	100	45	24	V1300, V250
50	70	1/0	2/0	AS50	9,6	20	100	42,5	24	V1300, V250
70	95	2/0	3/0	AS70	11,3	20	100	42,5	24	V1300, V250
95	120	3/0	250	AS95	12,5	25	130	57	12	V1300, V250
120	150	250	300	AS120	14	25	130	57	12	V1300, V250
150	185	300	350	AS150	15,8	25	130	58	12	V1300, V250
185	240	350	500	AS185	17,6	32	131	58	9	V1300, V250
240		500		AS240	19,8	32	131	58	9	V1300, V250
	300		600	AS300SOLID	20	36	177	83	6	V250
300		600		AS300	22	36	177	83	3	V250
400		750		AS400	25	40	179	83	3	V250
	400		750	AS400SOLID	23	40	179	83	3	V250
500		1000		AS500A	28	52	250	110	3	V250
500		1000		AS500B	28	44	184	83	3	V250
630		1250		AS630A-1	32	52	250	110	1	V250
630		1250		AS630A-2	34	52	250	110	1	V250
800		1600		AS800-1	36	60	288	129	1	V1470
1000		2000		AS1000-1	40	60	288	129	1	V1470
1200		2500		AS1200	44	70	320	142	1	V1470

For other combinations, please contact Elpress., s = strip length



ELPRESS®