




# ELPRESS®

## Product Datasheet

Pre-insulated TWIN-end terminals 2 x 0.5 - 2 x 10 mm<sup>2</sup>, ETW2, alternative colour code

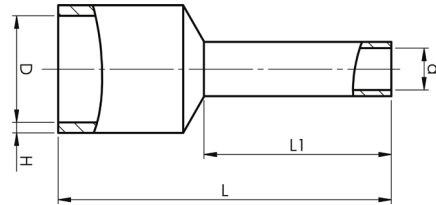

| mm <sup>2</sup> (Cu) | AWG Cu | Name         | d (mm) | D    | H   | L    | L1 | s  | Tool                    | Material  | Pcs/pack |
|----------------------|--------|--------------|--------|------|-----|------|----|----|-------------------------|-----------|----------|
| 2 x 0,5              | 2x20   | A0,5-6ETW2   | 1,5    | 4,5  | 2,3 | 13   | 6  | 8  | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 0,5              | 2x20   | A0,5-8ETW2   | 1,5    | 4,5  | 2,3 | 15   | 8  | 10 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 0,75             | 2x20   | A0,75-8ETW2  | 1,8    | 5,1  | 2,6 | 15   | 8  | 10 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 0,75             | 2x20   | A0,75-10ETW2 | 1,8    | 5,1  | 2,6 | 17   | 10 | 12 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 0,75             | 2x20   | A0,75-12ETW2 | 1,8    | 5,1  | 2,6 | 19   | 12 | 14 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 1                | 2x18   | A1-8ETW2     | 2      | 5,1  | 3   | 15   | 8  | 10 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 1                | 2x18   | A1-10ETW2    | 2      | 5,1  | 3   | 17   | 10 | 12 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 1                | 2x18   | A1-12ETW2    | 2      | 5,1  | 3   | 19   | 12 | 14 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 1,5              | 2x16   | A1,5-8ETW2   | 2,3    | 6,4  | 3,5 | 16   | 8  | 10 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 1,5              | 2x16   | A1,5-12ETW2  | 2,3    | 6,4  | 3,5 | 20   | 12 | 14 | PEB0110T                | Cu, Cu/Sn | 500      |
| 2 x 2,5              | 2x14   | A2,5-10ETW2  | 2,9    | 7,5  | 4   | 18,5 | 10 | 12 | PEB0110T                | Cu, Cu/Sn | 250      |
| 2 x 2,5              | 2x14   | A2,5-13ETW2  | 2,9    | 7,5  | 4   | 21,5 | 13 | 15 | PEB0110T                | Cu, Cu/Sn | 250      |
| 2 x 4                | 2x12   | A4-12ETW2    | 3,8    | 8,6  | 4,9 | 23   | 12 | 14 | GEB4010C-TWIN, PEB0110T | Cu, Cu/Sn | 100      |
| 2 x 4                | 2x12   | A4-18ETW2    | 3,8    | 8,6  | 4,9 | 26   | 18 | 20 | GEB4010C-TWIN, PEB0110T | Cu, Cu/Sn | 100      |
| 2 x 6                | 2x10   | A6-14ETW2    | 4,6    | 9,6  | 5,8 | 25   | 14 | 16 | GEB4010C-TWIN, PEB0110T | Cu, Cu/Sn | 100      |
| 2 x 6                | 2x10   | A6-18ETW2    | 4,6    | 9,6  | 5,8 | 29   | 18 | 20 | GEB4010C-TWIN, PEB0110T | Cu, Cu/Sn | 100      |
| 2 x 10               | 2x8    | A10-14ETW2   | 6,5    | 12,6 | 7   | 26   | 14 | 16 | GEB4010C-TWIN           | Cu, Cu/Sn | 100      |

s = strip length

Use the tool socket closest to the total area of the sleeve.



# ELPRESS®