




# ELPRESS®

## Product Datasheet

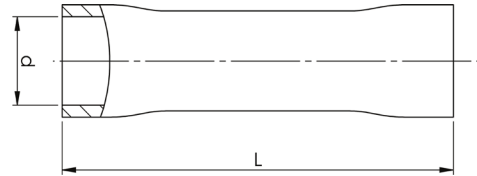

### Through connectors with heat shrink insulation 0.5 - 6 mm<sup>2</sup>

mm <sup>2</sup> (Cu)	AWG Cu	Name	d (mm)	L	s	Tool	Insulation material	Material	Pcs/pack	Tool
0,5-1,5	20-16	A1535SKW	3,7	31,5	8	GSW0560C	PA	Cu, Cu/Sn	25	GSW0560C
1,5-2,5	16-14	A2535SKW	4,6	31,5	8	GSW0560C	PA	Cu, Cu/Sn	25	GSW0560C
4-6	12-10	A4650SKW	6,5	37,5	9	GSW0560C	PA	Cu, Cu/Sn	25	GSW0560C

s = strip length

After crimping and heating with a hot air gun, a water proof terminal, glued to the cable and the connector, is achieved.



# ELPRESS®