


C-sleeves

Branching sleeves for Cu conductors
6-300 mm², made of copper 99.95%.



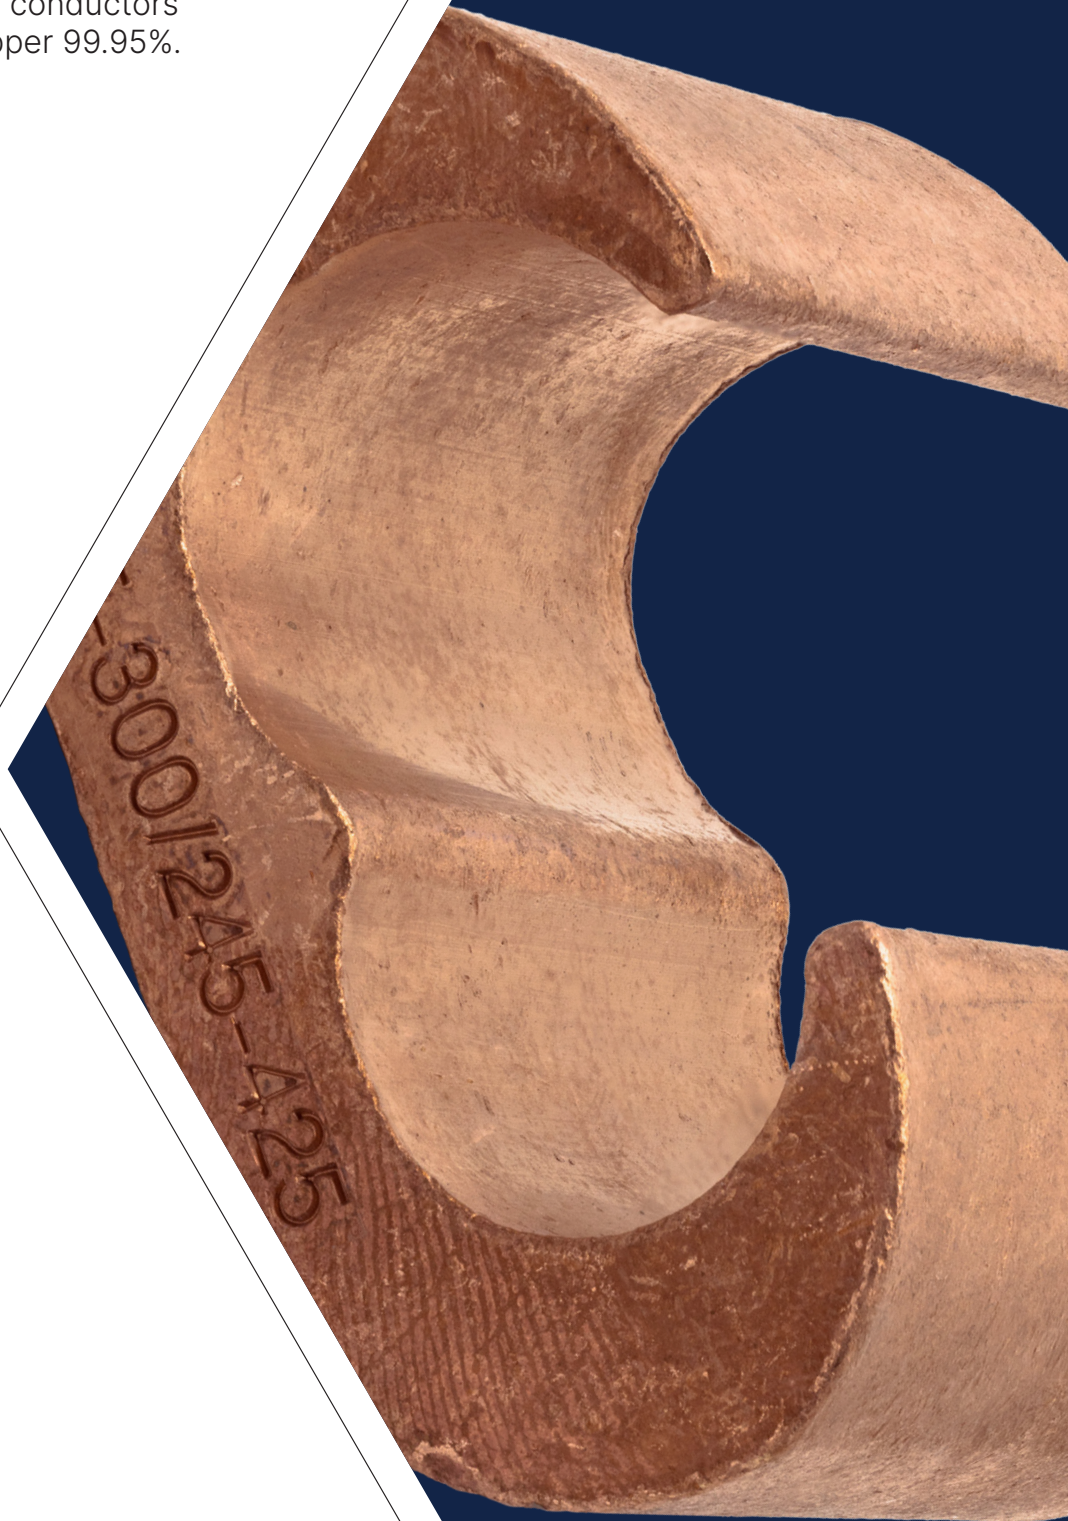

Next generation C-Sleeves


With a branching sleeve, type C, one splices and branches earth wires used in e.g. underground earth wire networks and other earthing and potential equalisation applications. Crimping of the C sleeves is done with Elpress mechanical, manual, battery-powered and/or plug-in hydraulic crimping tools for easy handling and rapid work. The products are tested with short circuit tests according to the IEC 61238-1 standard. All Elpress branch sleeves are based on the patented solution of the previous C89 sleeve. The solution means that the edges of the sleeve overlap after the contact crimping has been done. This patented solution allows multiple joint combinations to be used in one and the same sleeve.

8 new branching sleeves replace 41 existing C-sleeves.



Properties

- › Unique program.
- › Patented solution.
- › Simplifies installation.
- › Same dies as before – but fewer variants (BC16, BC11 and BC4 are withdrawn).
- › Short-circuit tested in accordance with IEC 61238-1.
- › Environmentally and quality certified according to ISO14001 and ISO9001.
- › Expanded area of use, conductors with cross sectional areas of 300 mm² can now be branched with 95, 70, 50 and 25 mm².
- › Material: Copper (Cu), tin plated (Cu/Sn).
- › Possible to front feed all branches.

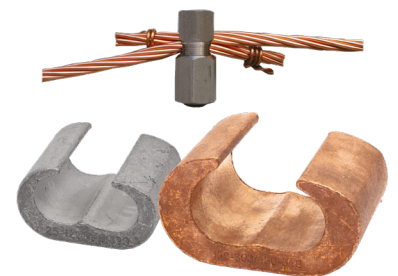



C50-70



Marking


$$\begin{array}{r}
 = \quad = \\
 25-95/95-145 \quad 70 \quad 95 \\
 + \quad + \\
 25 \quad 50
 \end{array}$$

(mm²)



C6-10	C16-25	C25-50	C50-70	C70-95	C95-120	C150-185	C240-300
6-16/12-26	5-25/30-50	6-50/50-100	25-95/95-145	25-120/140-190	25-185/175-240	25-300/245-425	150-300/450-540
5	6	89	13	13	15	18	21

Elpress C-Sleeve

Main	300				C150-185	C150-185	C150-185	C150-185	C150-185	C150-185	C240-300	C240-300	C240-300	C23
	240				C150-185	C150-185	C150-185	C150-185	C150-185	C150-185	C150-185	C150-185**	C240-300	
	185				C95-120	C95-120	C95-120	C150-185	C150-185	C150-185	C150-185	C150-185		
	150				C95-120	C95-120	C95-120	C95-120	C150-185	C150-185	C150-185			
	120				C70-95	C70-95	C70-95	C70-95* C95-120	C95-120	C95-120				
	95				C50-70	C50-70	C50-70 C70-95	C70-95 C70-95* C95-120						
	70				C50-70	C50-70	C50-70	C50-70 C70-95						
	50	C25-50	C25-50	C25-50	C25-50	C25-50	C25-50* C50-70							
	35			C25-50	C25-50	C25-50								
	25	C16-25	C16-25	C16-25	C16-25 C25-50									
	16	C6-10	C6-10	C16-25										
	10	C6-10	C6-10											
	6	C6-10												
 mm ²	6	10	16	25	35	50	70	95	120	150	185	240	300	Branch

* Side feed only

** For front feed with uncompressed coductors, use C240-300

